


LRM-244-#


PYROMID® multi channel pyroelectric detector

Description:

quad channel; T08 housing; medium chip size; thermal compensation; OpAmp; current mode; feedback 100 GOhm;




Housing:

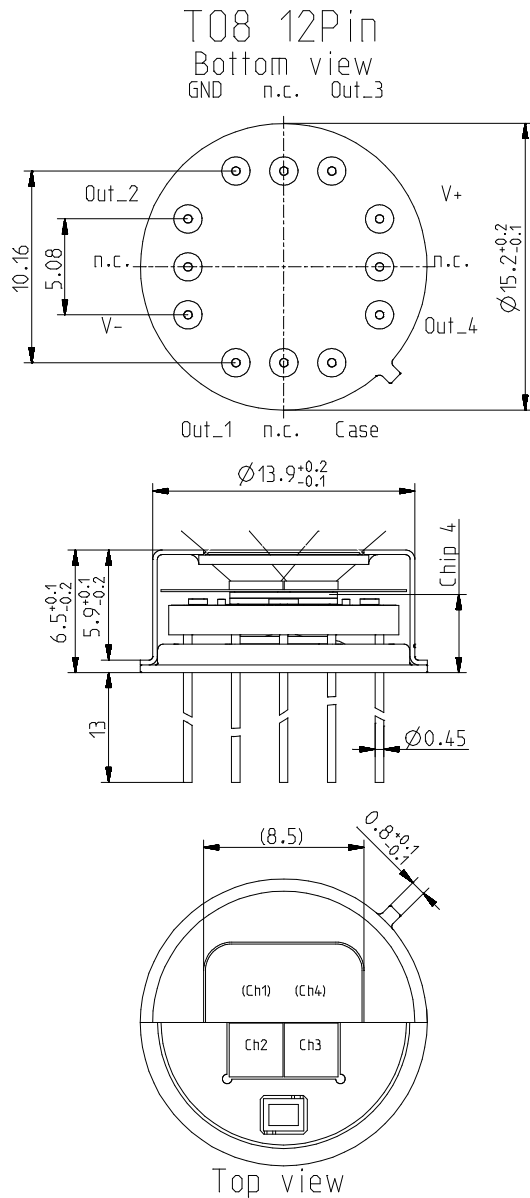

Maximum current between Case and the "Case"-Pin 10 mA!

Pin Assignment:

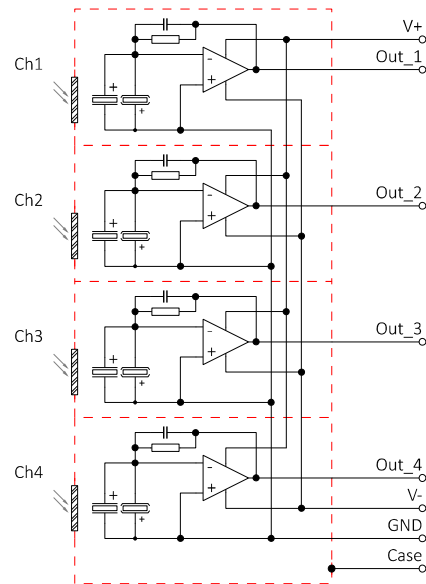

Frequency Response:

