
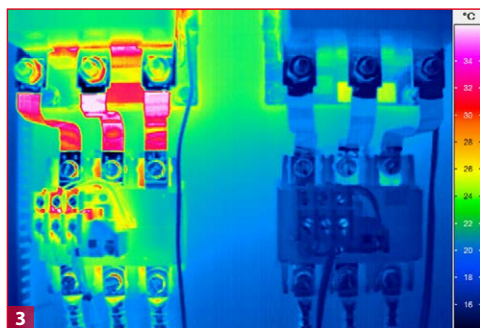


# compactIR 400

Powerful Entry Level Camera for Building Thermography and Maintenance

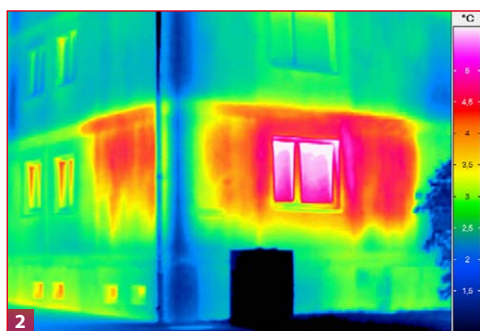

- 1) Rotatable and revolvable display
- 2) Building thermography
- 3) Inspection of electrical installations

## INFRA<sup>TEC</sup>.

Europe's leading specialist for infrared sensors and measurement technology

Microbolometer detector with (400 × 300) IR pixels

5" touchscreen with (1,280 × 720) pixels,

180° rotatable and 270° revolvable

Up to 70° inclinable lens unit

Temperature measurement range (-20 ... 2,000) °C\*

Motor focus with automatic function

Wide range of high-luminosity, interchangeable lenses



**NEW**

[www.InfraTec.eu](http://www.InfraTec.eu)



Spectral range	(8 ... 14) $\mu\text{m}$
Pitch	25 $\mu\text{m}$
Detector	Uncooled Microbolometer Focal Plane Array
Detector format (IR pixels)	(400 × 300)
Temperature measuring range	(-20 ... 800) °C, to 2,000 °C*
Measurement accuracy	$\pm 2$ °C or $\pm 2$ %
Temperature resolution @ 30 °C	0.045 K
Frame rate	60 Hz, 9 Hz*
Storage media	SDHC Card, 12 GB internal memory
Real-time storage	Yes: recording non radiometric thermal images (MPEG)
Focus	Motor-driven, manual, autofocus
Zoom	Up to 4x
Field of view	Standard lens: (23 × 17)°, wide-angle lens: (46 × 35)°, telephoto lens: (10 × 8)°
Minimum object distance (standard lens)	50 cm
Digital colour video camera	5 Megapixels
Interfaces	Micro-USB, Mini-HDMI, WLAN
Tripod adapter	1/4" photo thread
Power supply	AC adapter, Lithium-Ion battery
Integrated microphone and speaker	Yes
Laser pointer	Yes
Display	5" colour TFT display (1,280 × 720) pixels, 180° rotatable and 270° revolvable, touchscreen
Colour viewfinder	(1,280 × 960) pixels
Single-handed operation	Yes
Storage and operation temperature	(-40 ... 70) °C, (-15 ... 50) °C
Protection degree	IP54
Impact strength/vibration resistance in operation	25G, IEC 60068-2-29; 2G, IEC 60068-2-6
Dimensions; weight	(140 × 206 × 114) mm; 1.15 kg without Lithium-Ion battery
Automatic functions	Autofocus, temperature level and temperature range, alarm: visual and acoustic
Measurement functions	Global hot/cold spot display, center spot, 5 free choosable, movable measurement fields (line, rectangle, circle, ellipse)
Further functions	WLAN print, WLAN remote control, transmission of live images, internal report generator
Analysis and evaluation software*	IRBIS® 3, IRBIS® 3 plus, IRBIS® 3 professional, IRBIS® 3 report

\* Depending on model

The handheld **compactIR 400** thermographic camera extends the segment of the entry level cameras by a unique **detector format of (400 × 300) IR pixels**. The geometrical resolution exceeds those of cameras with standard formats by 1.6 times and means less work for users during the measurements. Apart from the detector format, the thermal resolution also achieves a level that stands out among cameras of this performance class. **Temperature differences of 0.045 K** can be detected reliably. You can see how easily the compactIR 400 can be operated, for example, when taking overhead thermal images or when inspecting objects that are difficult to access. The **lens unit can be tilted up to 70°** and thus simplifies work considerably when inconvenient angles impair the perfect shot of a subject. If you want to see whether your shot was successful, this is indicated by the **5" colour TFT display with (1,280 × 720) pixels**, which also serves as a **touchscreen** and is **rotatable up to 180° and revolvable up to 270°**. Thanks to this flexibility, the camera is ideally suited for use in the **maintenance of mechanical and electrical installations** and in **building thermography**.

The analysis and evaluation of measurement results can be carried out just as conveniently. Users, for example, can generate reports in PDF format already on the camera, transfer them to a printer via a **WLAN interface** and print them out immediately. The thermographic **IRBIS® 3 software family** developed by InfraTec is suitable for more detailed inspections.

Lens	Focal length (mm)	FOV (°)
Wide-angle lens	10	(57.1 × 44.4)
Standard lens	20	(30.4 × 23.1)
Telephoto lens	40	(15.5 × 11.6)

Headquarters

**InfraTec GmbH**  
**Infrarotsensorik und Messtechnik**  
 Gostritzer Str. 61 – 63  
 01217 Dresden / GERMANY  
 Phone +49 351 871-8630  
 Fax +49 351 871-8727  
 E-mail thermo@InfraTec.de